


# TUSCIA

ACOL

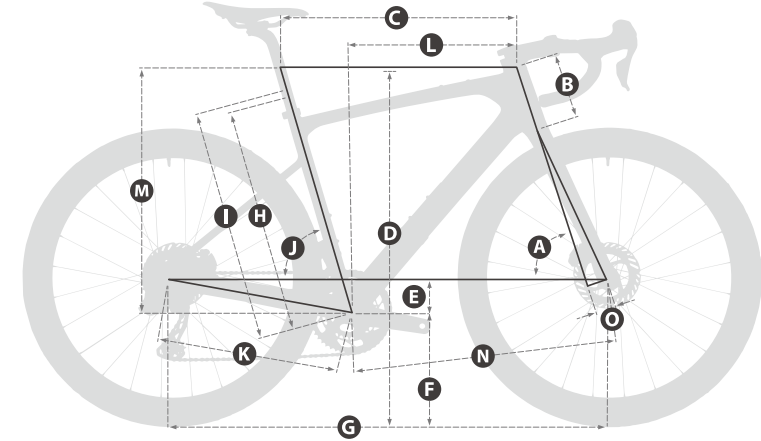

**FRAME WEIGHT** 880 g [M Size, Raw frame without removable Parts]  
**CARBON GRADE** WINACT-G1 CARBON  
**CHARACTERISTIC** Gravel

<b>GROUPSET</b>	GRX RX-820 2x12
<b>BREAKS</b>	<b>Front Brake</b> Shimano GRX BR-RX820
	<b>Rear Brake</b> Shimano GRX BR-RX820
	<b>Rotor</b> Shimano RT-MT800 160mm
<b>DRIVETRAIN</b>	<b>Shift Levers</b> Shimano GRX ST-RX820
	<b>Front Derailleur</b> Shimano GRX FD-RX820
	<b>Rear Derailleur</b> Shimano GRX RD-RX820
	<b>Cassette</b> Shimano 105 CS-HG710 12,11-36T
	<b>Chain</b> Shimano CN-M8100
	<b>Crankset*</b> Shimano GRX FC-RX820-2
	<b>Chainrings</b> 48-31T
<b>WHEEL &amp; TIRE</b>	<b>Bottom Bracket</b> Shimano SM-BB72-41B
	<b>Front Wheel</b> DT Swiss G 1800 SPLINE
	<b>Rear Wheel</b> DT Swiss G 1800 SPLINE
	<b>Front Tire</b> Schwalbe G-One Bite 38C
	<b>Rear Tire</b> Schwalbe G-One Bite 38C
<b>COCKPIT</b>	<b>Handlebar</b> FSA ADVENTURE COMPACT AGX
	<b>Stem</b> FSA SMR
<b>OTHER PARTS</b>	<b>Saddle</b> San Marco shortfit Dynamic Open wide
	<b>Seatpost</b> 27.2 25mm / 0mm

## GEOMETRY

	XS	S	M	L	XL	XXL
A. Head Tube Angle	70.5°	72°	72.5°	73°	72.3°	72.5°
B. Head Tube Length	92	110	127	147	167	191
C. Top Tube Length [Horizontal]	515	542	553	571	586	600
D. Standover Height	741	763	782	805	832	857
E. Bottom Bracket Drop	75	75	75	75	75	75
F. Bottom Bracket Height	278	278	278	278	278	278
G. Wheelbase	1009	1018	1025	1034	1046	1058
H. Seat Tube Length [B-B Centre to Centre]	411	435	455	484	516	544
I. Seat Tube Length [B-B Centre to Top]	448	472	491	520	550	580
J. Seat Tube Angle	75.5°	74°	74°	73.5°	73.5°	73.5°
K. Chainstay Length	425	425	425	425	425	425
L. Reach	381	388	394	401	409	416
M. Stack	518	537	555	576	596	620
N. Front-Centre	595	596	611	620	632	645
O. Fork Offset	50	50	50	50	50	50

## COMPONENT COMPATIBILITY

Components	Compatible Sizes
<b>Upper Headset Bearing</b>	51.8mm OD x 40.0mm ID x 8mm X 45°
<b>Lower Headset Bearing</b>	51.8mm OD x 40.0mm ID x 8mm X 45°
<b>Front Thru-Axle</b>	12 x 100
<b>Rear Thru-Axle</b>	12 x 142
<b>Rear Dropout Hanger</b>	UDH
<b>Min/Max Chainring</b>	34-42t / 48-55t
<b>Min/Max Front and Rear Rotor</b>	140mm / 160mm
<b>Max Tire</b>	45C

\* Crank Length : XXS 165mm / XS 170mm / S 170mm / M 172.5mm / L 172.5mm / XL 175mm